

M038




Give you happiness

M038 Instruction manual


Notes before assembling

Making tips


1. LED wiring indication: White=Positive; Grey=Negative.
2. Use a craft blade to carefully skim over the plastic to bare the copper wire.
3. For LED wiring extension, please refer to the below steps:



Twist the copper of both LED wire and extension wire together.




Do the same on the white wire.
Remarks: Tie a knot at the end of the grey wire to differentiate the polarity.




Place the duly twist wire on the tapes provided.



Roll and wrap the wire.



Place another wire next to it.
Remarks: DO NOT contact both copper wire to avoid short circuit.




Roll and wrap it together.

Warnings


- The product is not suitable for children under 14 years old. The should be under custody of adults when playing with the product.
- There are small parts, please do not swallow them for avoiding dangerous accidents.
- Please also pay attention to the sharp-pointed materials to avoid injuries.

Tips for assembling

1. Pictures shown on the package may be slightly different from the actual product.
2. Please use the provided tracing paper for cutting purpose to achieve the best outcome.
3. Product designs and specification may be subject to change without advance notice for purpose of making improvement.
4. Testing on LED function:



DO NOT contact the LED wire end direct to the battery cell.



Use the provide battery holder. Make sue the correct polarity.

How to assemble the battery holder



1. Material and tools needed:
- Battery holder, LED bulb, tape, screw driver and 2 piece AA size battery (not provided)



2. Use screw driver and take the lid off from the battery holder.



3. Insert the battery take notes on the polarity.



4. Connect the red wire to grey wire. Connect the black wire to white wire.



5. Wrap the exposed wire with the tapes.








6. Place the box lid and fastness with screw driver.


Product information







Before production begins please cut the G01,G02,G05,G06,G07,G13,G14 according to the respective template.
(The template for G01 is at the end of the material list.)

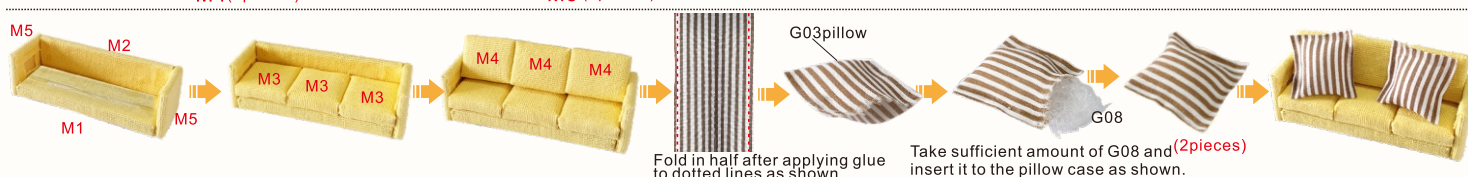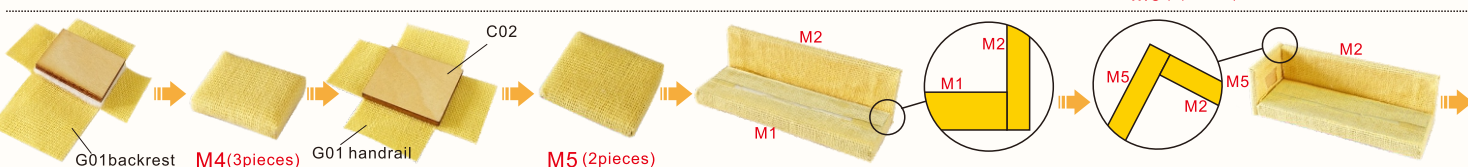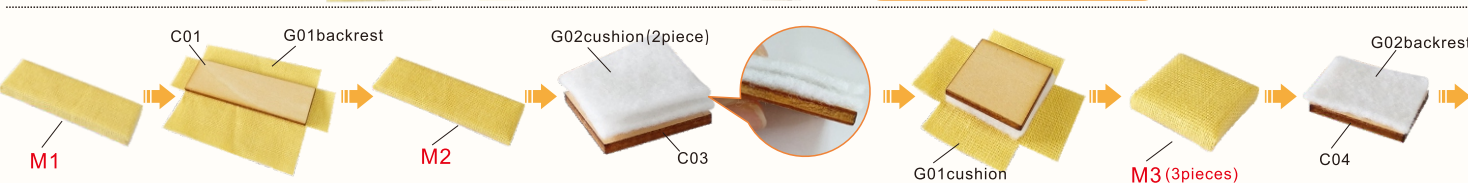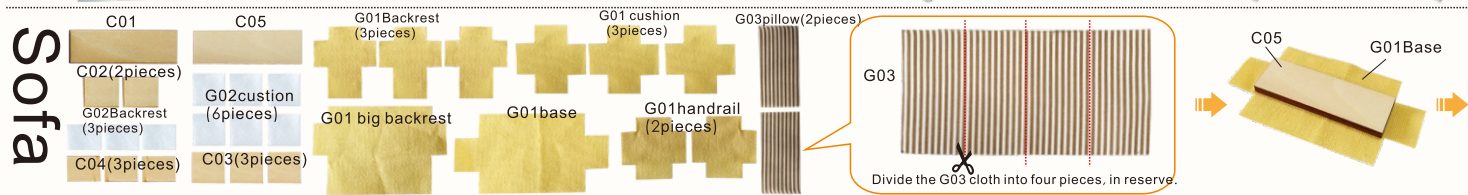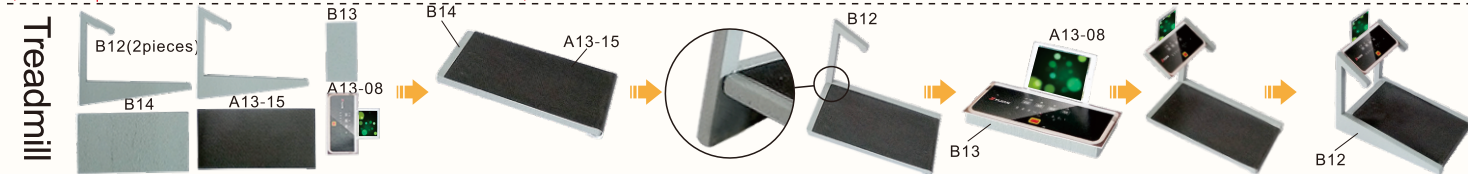






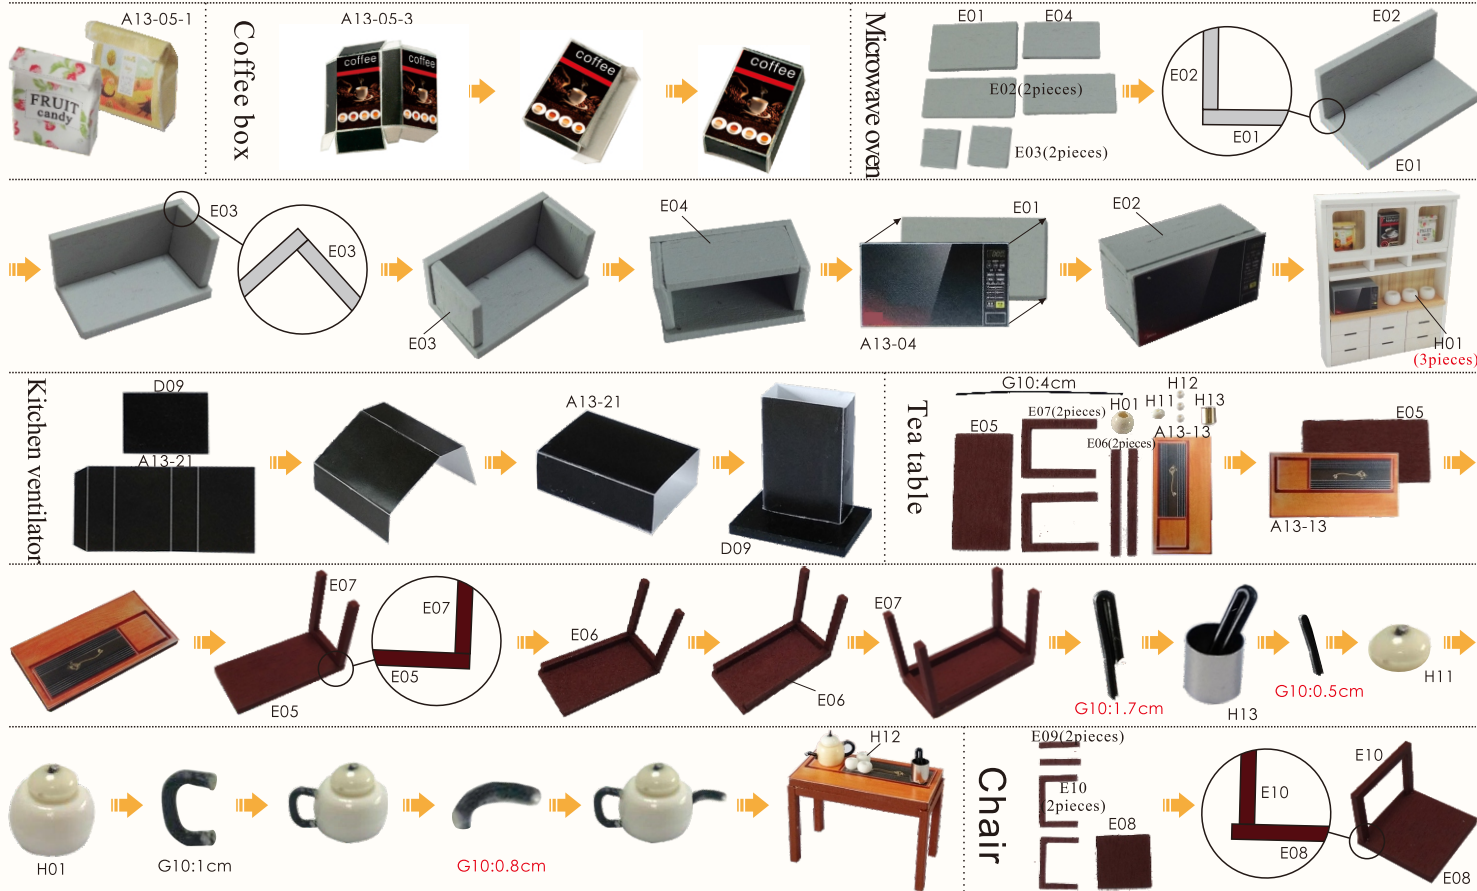


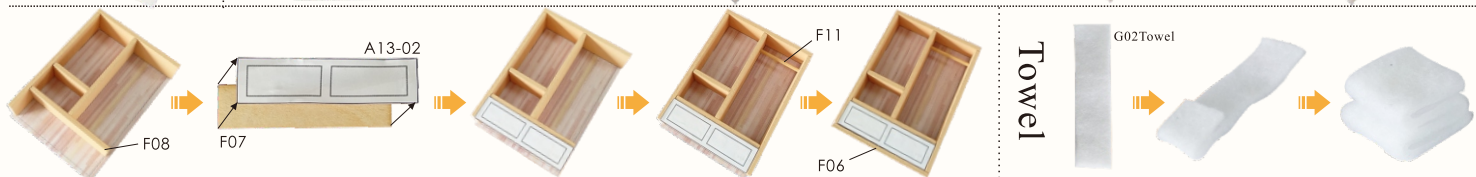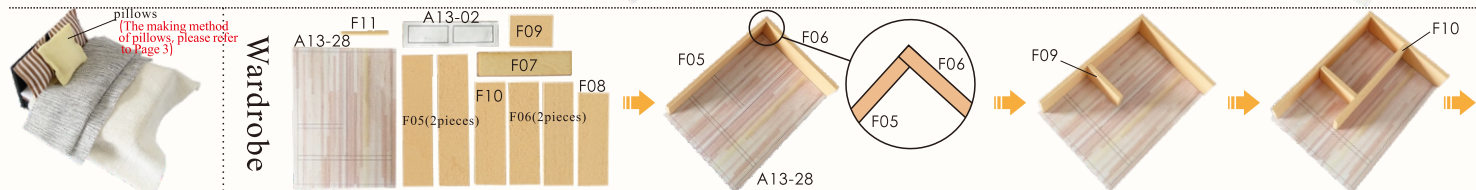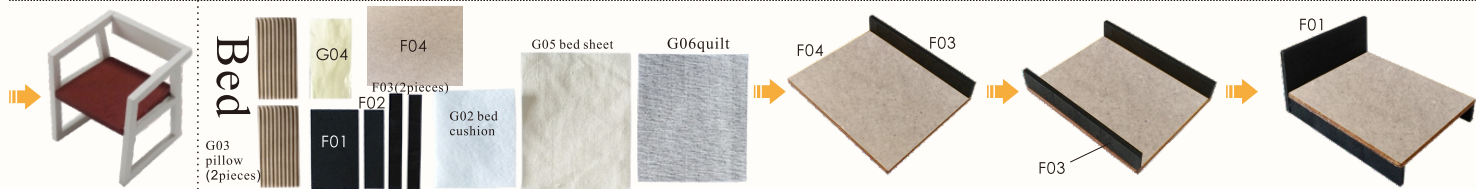
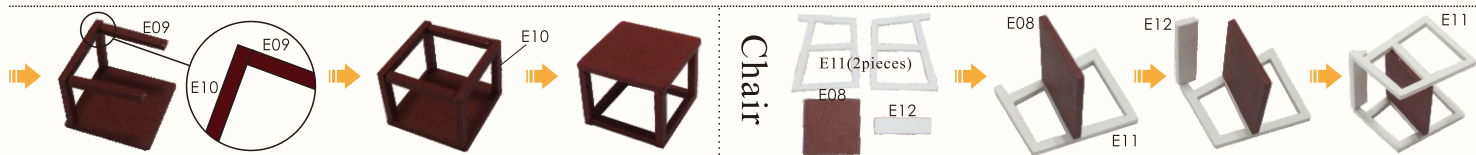






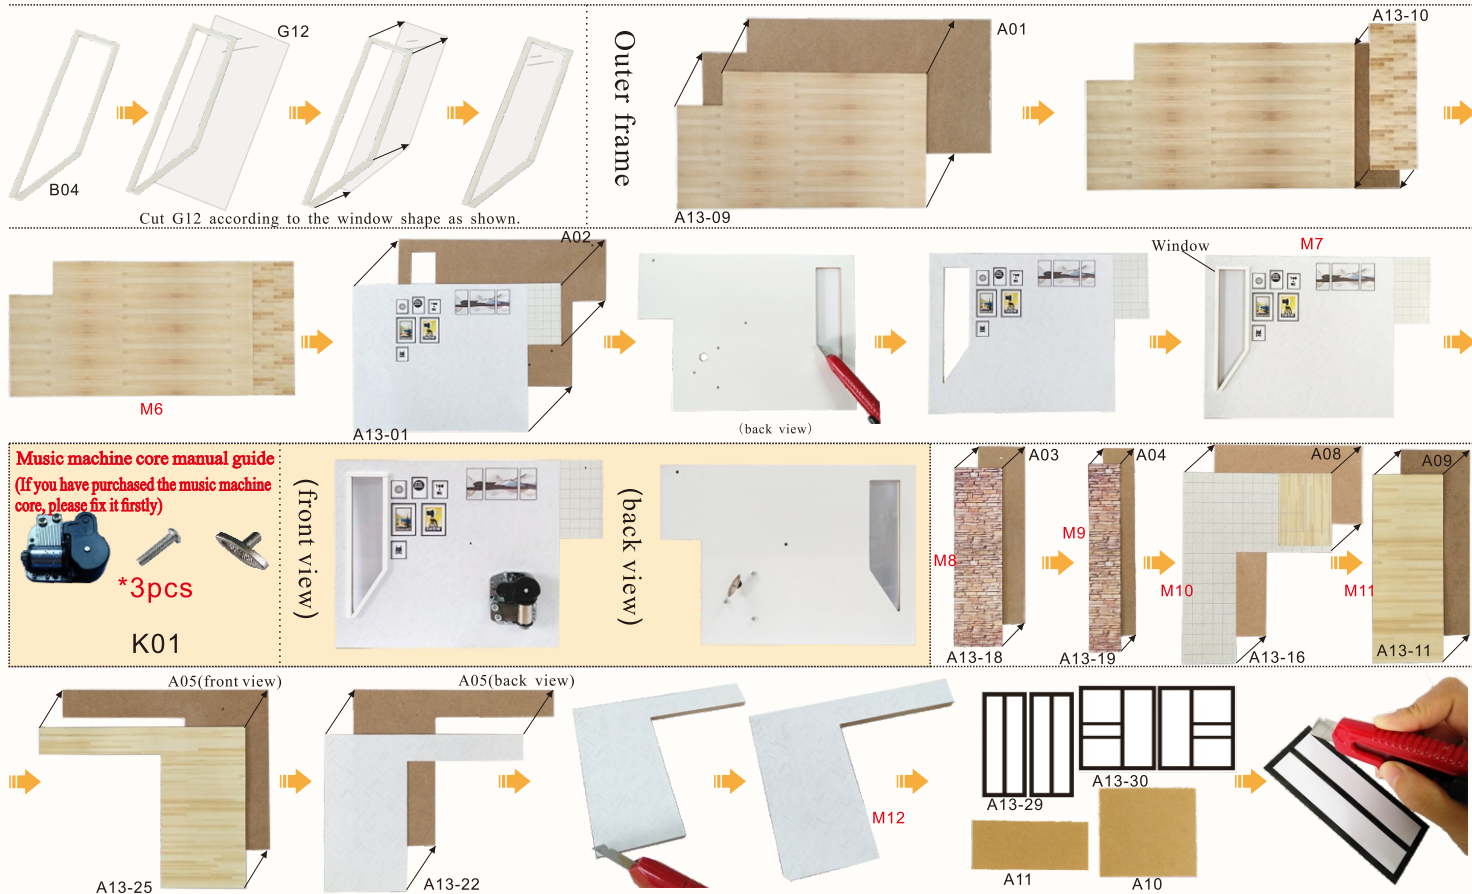

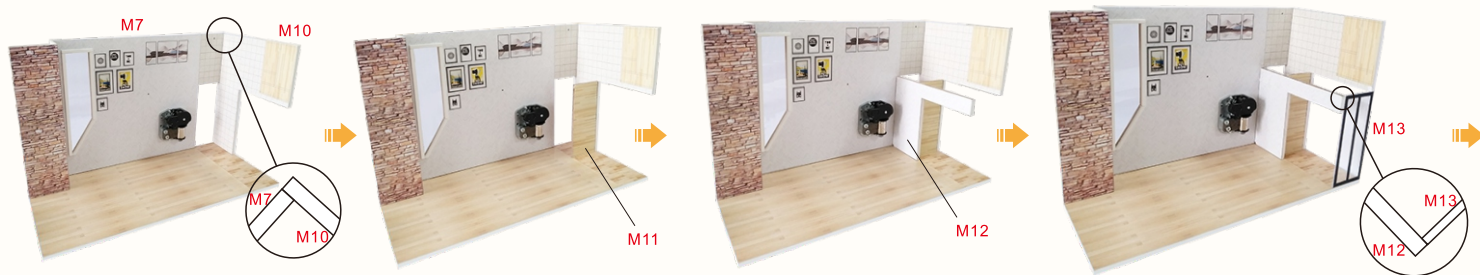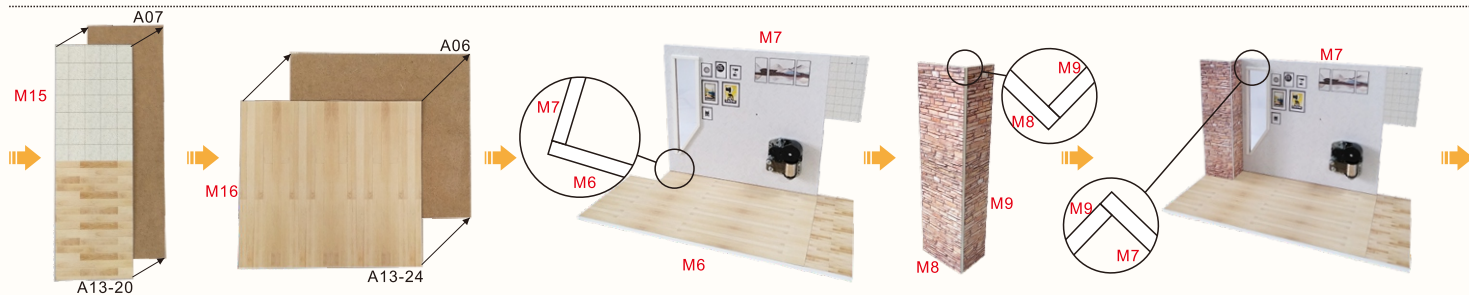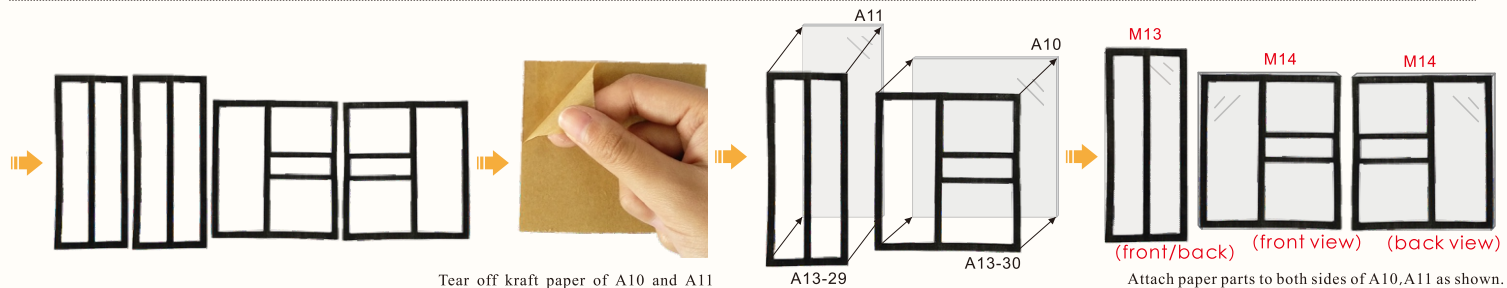

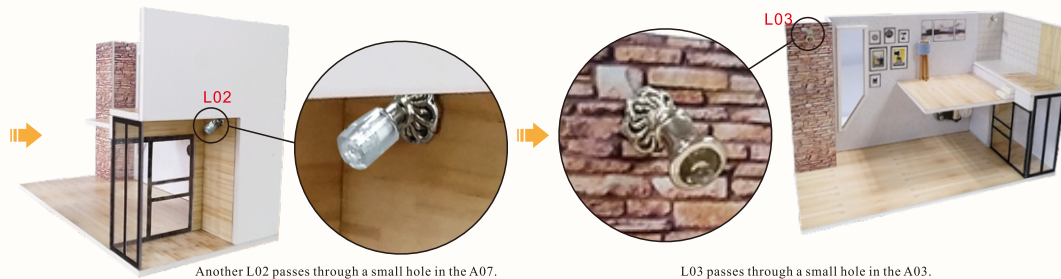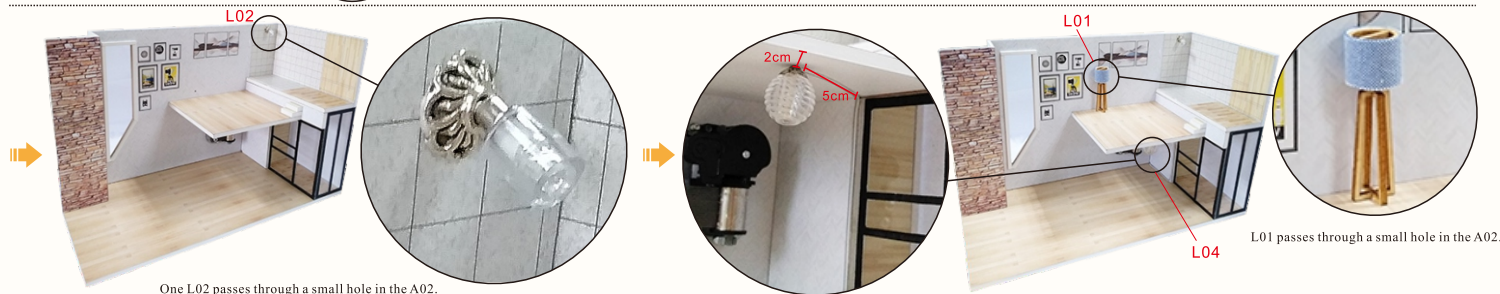


Statement: the lamp wires cannot be inserted into the output socket.

- Can use 5 batteries
- Please notice the place of anode and cathode when pit in the batteries
- Rechargeable batteries are not blunt electricity
- Rechargeable batteries can only be charged under adult supervision
- Rechargeable batteries should be removed from the toy before charging
- Different types of batteries cannot mix; Do not mix new batteries in use with semi-used batteries.
- Run out of battery should be removed from the toy
- The power shall not be short circuit




Installation of dust proof cover
(For updated version, the parts need to be purchased separately)



K02 Transparent cover
0. 2*14*30 1piece




K03 Transparent cover
0. 2*10. 3*18 1piece



K04 Transparent cover
0. 2*18*30 1piece



1. Tear off kraft paper of each piece of transparent cover.

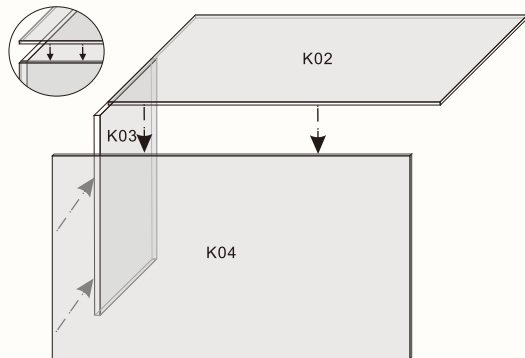

2. Paste K02, K03, and K04 together to complete the dust proof cover as shown.

Photo of Dust proof cover





Attention: Please keep the instruction for future enquires after installation.